



## MP 56

### S-Type Load Cell



#### 60kg... 5t, Type N/C3

- Full stainless steel construction
- High resolution and linearity
- Hermetically welded seal (IP67)
- Robust and 100% maintenance free
- Approved according to OIML R60
- Ex-Version available (MP56/...E)

#### Applications

- Mechanical scale conversions
- Suspended tank and hopper scales
- Ideal for tension measurement


Technical Data		N	C3	
Accuracy class		0.03	0.02	%
Minimum dead load	$E_{min}$	0	0	% $E_{max}$
Rated capacity	$E_{max}$	s. table	s. table	
Safe overload	$E_U$	150	150	% $E_{max}$
Destructive load	$E_d$	> 300	> 300	% $E_{max}$
Minimum LC verification interval $v_{min} = E_{max}/Y$		-	8,333	
Rated output	$C_n$	2	2	mV/V
Tolerance on rated output	$d_c$	≤ 0.25	≤ 0.25	% $C_n$
Zero output signal	$S_{min}$	≤ 1	≤ 1	% $C_n$
Repeatability	$\epsilon_R$	≤ 0.01	≤ 0.01	% $C_n$
Creep, during 30min.	$d_{cr}$	≤ 0.03	≤ 0.017	% $C_n$
Temperature effect on $S_{min}$	$TK_0$	≤ 0.028	≤ 0.017	% $C_n/10K$
Temperature effect on C	$TK_c$	≤ 0.025	≤ 0.011	% $C_n/10K$
Input impedance	$R_{ic}$	400 ± 50	400 ± 50	Ω
Output impedance	$R_o$	352 ± 3	352 ± 3	Ω
Insulation impedance	$R_{is}$	> 2,000	> 2,000	MΩ
Recommended supply voltage	$B_u$	10	10	V
Maximum supply voltage	$U_{max}$	20	20	V

#### По вопросам продаж и поддержки обращайтесь:

Астана+7(7172)727-132, Волгоград(844)278-03-48, Воронеж(473)204-51-73, Екатеринбург(343)384-55-89,  
Казань(843)206-01-48, Краснодар(861)203-40-90, Красноярск(391)204-63-61, Москва(495)268-04-70,  
Нижегород(831)429-08-12, Новосибирск(383)227-86-73, Ростов-на-Дону(863)308-18-15, Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40, Саратов(845)249-38-78, Уфа(347)229-48-12

Technical Data		N	C3	
Nominal ambient temperature range	B <sub>T</sub>	-10 to +40	-10 to +40	° C
Usable ambient temperature range	B <sub>TU</sub>	-30 to +70	-30 to +70	° C
Nominal deflection	S <sub>nom</sub>	≤ 0.3	≤ 0.3	mm
Cable	-	5m, 4 wires with screen	5m, 4 wires with screen	
Protection class	-	IP 67	IP 67	

The technical data given here serve only as a product description and must not be interpreted as guaranteed characteristics in the legal sense.

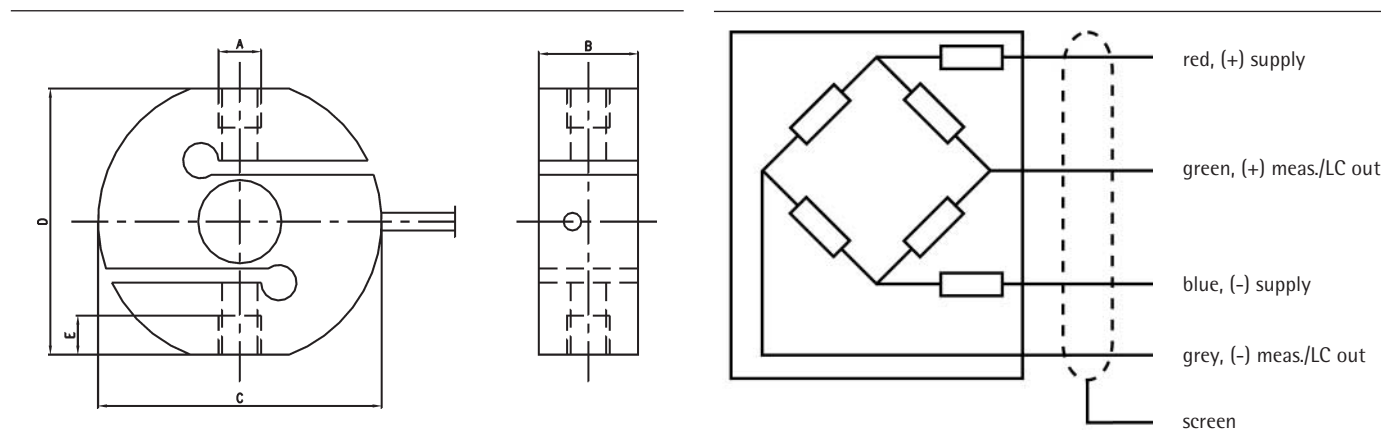

Dimensions in mm

Capacity	A	B	Deflection	Weight
60kg to 500kg	M12 x 1.75	28	≤ 0.1mm	1kg
1t	M20 x 1.5	28	≤ 0.3mm	1.5kg
2t	M20 x 1.5	28	≤ 0.3mm	1.5kg
3t, 5t	M20 x 1.5	28	≤ 0.3mm	2.5kg

#### Accessories

Type	Description	Order number
MP46/81	swivel eye for MP56/60kg... MP56/500kg	9408 800 46811
MP46/82	swivel eye for MP56/1t... MP56/5t	9408 800 46821

#### Order information

Type	Order number	Type	Order number	Rated capacity (2mv/V)
MP56/60kg C3	9408 256 03060	MP56/60kg N	9408 256 01060	60kg
MP56/125kg C3	9408 256 03112	MP56/125kg N	9408 256 01112	125kg
MP56/250kg C3	9408 256 03125	MP56/250kg N	9408 256 01125	250kg
MP56/500kg C3	9408 256 03150	MP56/500kg N	9408 256 01150	500kg
MP56/1t C3	9408 256 03210	MP56/1t N	9408 256 01210	1000kg
MP56/2t C3	9408 256 03220	MP56/2t N	9408 256 01220	2000kg
MP56/3t C3	9408 256 03230	MP56/3t N	9408 256 01230	3000kg
MP56/5t C3	9408 256 03250	MP56/5t N	9408 256 01250	5000kg

#### Certificate of conformity

Features: II 1D IP65 T85°, II 2D IP65 T85°  
Reg. Number: TÜV 03 ATEX 2301x

#### По вопросам продаж и поддержки обращайтесь:

Астана+7(7172)727-132, Волгоград(844)278-03-48, Воронеж(473)204-51-73, Екатеринбург(343)384-55-89,  
Казань(843)206-01-48, Краснодар(861)203-40-90, Красноярск(391)204-63-61, Москва(495)268-04-70,  
Нижний Новгород(831)429-08-12, Новосибирск(383)227-86-73, Ростов-на-Дону(863)308-18-15, Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40, Саратов(845)249-38-78, Уфа(347)229-48-12

sst@nt-rt.ru || sartorius.nt-rt.ru