



sartorius

## MP 58, MP 58T

### Stainless Steel Shear Beam Load Cell



91 kg... 2,268kg Type N/C3/C3MR  
(200lb... 5,000lb)

- Full stainless steel construction
- Compatible with other sources
- Approved according to OIML R60
- Ex-Version available (MP58/...E, MP58T/...E)
- Matched output
- High input impedance

#### Applications

- Platform scales
- Tank & Hopper scales

Technical Data		N	C3	C3MR	
Accuracy class		0.03	0.02	0.02	% $E_{max}$
Maximum capacity	$E_{max}$	s. table	s. table	s. table	
Max. usable load	$E_u$	200	200	200	% $E_{max}$
Destructive load	$E_d$	> 300	> 300	> 300	% $E_{max}$
Minimum LC verification interval $v_{min} = E_{max}/Y$	Y	-	6,000	11,500	
Rated output	$C_n$	2.0	2.0	2.0	mV/V
Tolerance on rated output	$d_c$	≤ 0.1	≤ 0.1	≤ 0.1	% $C_n$
Zero output signal	$S_{min}$	≤ 1.0	≤ 1.0	≤ 1.0	% $C_n$
Creep, during 30min.	$d_{cr}$	≤ 0.025	≤ 0.016	≤ 0.016	% $C_n$
Temperature effect on $S_{min}$	$TK_{Smin}$	≤ 0.035	≤ 0.023	≤ 0.011	% $C_n/10K$
Temperature effect on C	$TK_C$	≤ 0.014	≤ 0.010	≤ 0.010	% $C_n/10K$
Input impedance	$R_{iC}$	1,100 ± 50	1,100 ± 50	1,100 ± 50	Ω
Output impedance	$R_o$	1,000 ± 2	1,000 ± 2	1,000 ± 2	Ω
Insulation impedance	$R_{iS}$	> 5,000	> 5,000	> 5,000	MΩ
Recommended supply voltage	$B_u$	5... 15	5... 15	5... 15	V
Maximum supply voltage	$U_{max}$	15	15	15	V
Nominal ambient temperature range	$B_T$	-10 to +40	-10 to +40	-10 to +40	° C
Usable ambient temperature range	$B_{Tu}$	-30 to +70	-30 to +70	-30 to +70	° C


#### По вопросам продаж и поддержки обращайтесь:

Астана+7(7172)727-132, Волгоград(844)278-03-48, Воронеж(473)204-51-73, Екатеринбург(343)384-55-89,  
Казань(843)206-01-48, Краснодар(861)203-40-90, Красноярск(391)204-63-61, Москва(495)268-04-70,  
Нижний Новгород(831)429-08-12, Новосибирск(383)227-86-73, Ростов-на-Дону(863)308-18-15, Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40, Саратов(845)249-38-78, Уфа(347)229-48-12

sst@nt-rt.ru || sartorius.nt-rt.ru

Technical Data		N	C3	C3MR	
Nominal deflection	$E_{max} = 91\text{kg}, 227\text{kg}, 454\text{kg}$	$S_{nom} \leq 0.25$	$\leq 0.25$	$\leq 0.25$	mm
	$E_{max} = 1,134\text{kg}$	$\leq 0.33$	$\leq 0.33$	$\leq 0.33$	mm
	$E_{max} = 2,268\text{kg}$	$\leq 0.56$	$\leq 0.56$	$\leq 0.56$	mm
Cable length		3	3	3	m
Environmental protection		IP 67	IP 67	IP 67	

The technical data given here serve only as a product description and must not be interpreted as guaranteed characteristics in the legal sense.

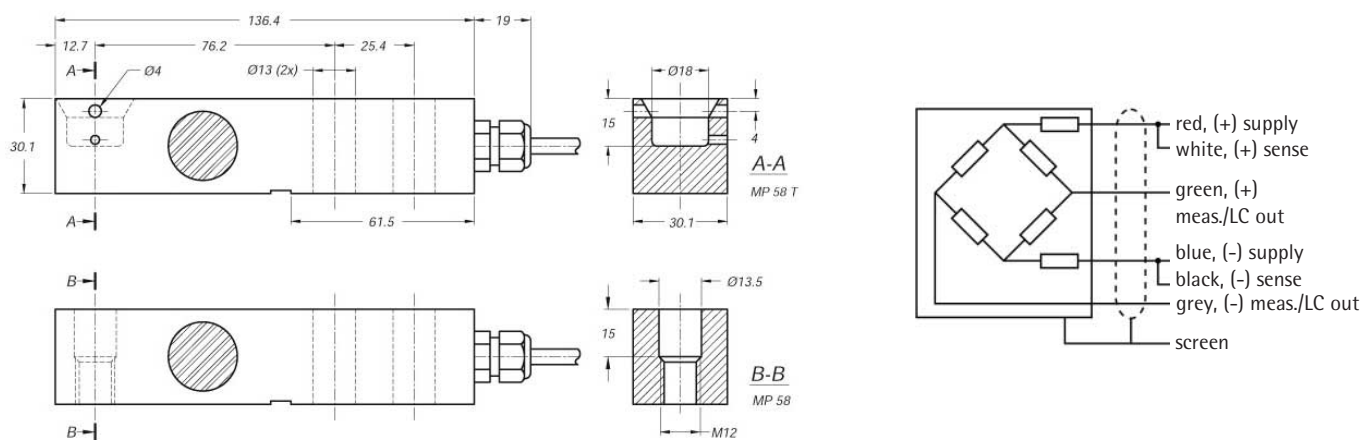

#### Order information

Type	Order number	Type	Order number	Type	Order number
MP58/91kg N	9408 258 01090	MP58/91kg C3	9408 258 03090	MP58/91kg C3MR	9408 258 07090
MP58/227kg N	9408 258 01120	MP58/227kg C3	9408 258 03120	MP58/227kg C3MR	9408 258 07120
MP58/454kg N	9408 258 01150	MP58/454kg C3	9408 258 03150	MP58/454kg C3MR	9408 258 07150
MP58/1134kg N	9408 258 01210	MP58/1134kg C3	9408 258 03210	MP58/1134kg C3MR	9408 258 07210
MP58/2268kg N	9408 258 01220	MP58/2268kg C3	9408 258 03220	MP58/2268kg C3MR	9408 258 07220
MP58T/91kg N	9408 258 11090	MP58T/91kg C3	9408 258 13090	MP58T/91kg C3MR	9408 258 17090
MP58T/227kg N	9408 258 11120	MP58T/227kg C3	9408 258 13120	MP58T/227kg C3MR	9408 258 17120
MP58T/454kg N	9408 258 11150	MP58T/454kg C3	9408 258 13150	MP58T/454kg C3MR	9408 258 17150
MP58T/1134kg N	9408 258 11210	MP58T/1134kg C3	9408 258 13210	MP58T/1134kg C3MR	9408 258 17210
MP58T/2268kg N	9408 258 11220	MP58T/2268kg C3	9408 258 13220	MP58T/2268kg C3MR	9408 258 17220
MP58/91kg...NE	9408 658 01090	MP58/91kg...C3E	9408 658 03090	MP58/91kg...C3MRE	9408 658 07090
MP58/227kg...NE	9408 658 01120	MP58/227kg...C3E	9408 658 03120	MP58/227kg...C3MRE	9408 658 07120
MP58/454kg...NE	9408 658 01150	MP58/454kg...C3E	9408 658 03150	MP58/454kg...C3MRE	9408 658 07150
MP58/1134kg...NE	9408 658 01210	MP58/1134kg...C3E	9408 658 03210	MP58/1134kg...C3MRE	9408 658 07210
MP58/2268kg...NE	9408 658 01220	MP58/2268kg...C3E	9408 658 03220	MP58/2268kg...C3MRE	9408 658 07220
MP58T/91kg...NE	9408 658 11090	MP58T/91kg...C3E	9408 658 13090	MP58T/91kg...C3MRE	9408 658 17090
MP58T/227kg...NE	9408 658 11120	MP58T/227kg...C3E	9408 658 13120	MP58T/227kg...C3MRE	9408 658 17120
MP58T/454kg...NE	9408 658 11150	MP58T/454kg...C3E	9408 658 13150	MP58T/454kg...C3MRE	9408 658 17150
MP58T/1134kg...NE	9408 658 11210	MP58T/1134kg...C3E	9408 658 13210	MP58T/1134kg...C3MRE	9408 658 17210
MP58T/2268kg...NE	9408 658 11220	MP58T/2268kg...C3E	9408 658 13220	MP58T/2268kg...C3MRE	9408 658 17220

#### По вопросам продаж и поддержки обращайтесь:

Астана+7(7172)727-132, Волгоград(844)278-03-48, Воронеж(473)204-51-73, Екатеринбург(343)384-55-89,  
 Казань(843)206-01-48, Краснодар(861)203-40-90, Красноярск(391)204-63-61, Москва(495)268-04-70,  
 Нижний Новгород(831)429-08-12, Новосибирск(383)227-86-73, Ростов-на-Дону(863)308-18-15, Самара(846)206-03-16,  
 Санкт-Петербург(812)309-46-40, Саратов(845)249-38-78, Уфа(347)229-48-12

[sst@nt-rt.ru](http://sst@nt-rt.ru) || [sartorius.nt-rt.ru](http://sartorius.nt-rt.ru)