



# Sartoclean GF

Adsorptive Membrane Filter for Colloid and Bioburden Reduction



## Specifications

### Materials

Prefilter Membrane:	Cellulose Acetate
Endfilter Membrane:	Cellulose Acetate
Filter active fleece:	Glass Fiber
Support Fleece:	Polypropylene
Core:	Polypropylene
End caps:	Polypropylene
O-Rings:	Silicone (optional EPDM or Viton)

### Pore Sizes

0.8 + 0.65  $\mu\text{m}$   
3.0 + 0.8  $\mu\text{m}$

### Available Sizes | Filtration Area

#### Cartridges

Size 1	10"	0.6 m <sup>2</sup>   6.5 ft <sup>2</sup>
Size 2	20"	1.2 m <sup>2</sup>   12.9 ft <sup>2</sup>
Size 3	30"	1.8 m <sup>2</sup>   19.4 ft <sup>2</sup>

#### Mini Cartridges

Size 7	0.05 m <sup>2</sup>   0.54 ft <sup>2</sup>
Size 8	0.1 m <sup>2</sup>   1.1 ft <sup>2</sup>
Size 9	0.2 m <sup>2</sup>   2.2 ft <sup>2</sup>

#### Available Adapters Cartridges

21, 25, 27, 28

#### Available Adapter Mini-Cartridges

15

### Operating Parameters

Max. allowable Differential pressure:	5 bar   72.5 psi at 20 °C (Cartridges)
	2 bar   29 psi at 80 °C (Cartridges and Capsules)
Max. allowable back pressure:	2 bar   29 psi at 20 °C

### Description

Sartoclean GF filter cartridges combine absolute retention performance by membrane filtration with high adsorptive power by glass fiber fleeces. Therefore Sartoclean GF are ideally suited for removal of colloids and lipids as well as defined particle retention and bioburden reduction for a broad range of bio-pharmaceutical applications.

### Applications

Sartoclean GF filter cartridges are widely used for prefiltration in biotech manufacturing processes to protect subsequent downstream processing equipment. Typical applications include bioburden reduction as well as effective colloid and lipid removal from:

- Fermentation broths
- Serum
- Cell Culture Media
- Colloid and Lipid containing solutions

### Process Safety

The removal of colloidal contaminants and lipids by adsorption allows an effective downstream processing and bioburden reduction by membrane filtration avoids formation of pyrogens during the process resulting in an increased process safety especially for biotech derived fluids.

### Performance

The combination of adsorptive glass fiber fleeces with membrane filters assures optimal total throughput performance and allow for economic filtration system design.

### Flexibility

Sartoclean GF filters are available as standard filter cartridges and mini-cartridges and offering broadest choice for scale-up and easiest adoption to varying process volumes.

### Documentation

Sartoclean GF cartridges are designed, developed and manufactured in accordance with a ISO 9001 certified Quality Management System. A Validation Guide is available for compliance with regulatory requirements.

## По вопросам продаж и поддержки обращайтесь:

Астана+7(7172)727-132, Волгоград(844)278-03-48, Воронеж(473)204-51-73, Екатеринбург(343)384-55-89,  
Казань(843)206-01-48, Краснодар(861)203-40-90, Красноярск(391)204-63-61, Москва(495)268-04-70,  
Нижегород(831)429-08-12, Новосибирск(383)227-86-73, Ростов-на-Дону(863)308-18-15, Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40, Саратов(845)249-38-78, Уфа(347)229-48-12

[sst@nt-rt.ru](mailto:sst@nt-rt.ru) || [sartorius.nt-rt.ru](http://sartorius.nt-rt.ru)

## Specifications

### Extractables

Sartoclean GF cartridges and mini cartridges meet or exceed the requirements for WFI quality standards set by the current USP.

### Regulatory Compliance

Non pyrogenic according to USP Bacterial Endotoxins

Pass USP Plastic Class VI Test

Non fiber releasing according to 21 CFR

### Sterilization

#### In-Line Steam Sterilization

134 °C, 20 min. at max differential pressure of 0.5 bar | 7 psi

#### Autoclaving

134 °C, 2 bar | 29 psi, 30 min

#### Sterilization Cycles


In-Line Sterilization: Min. 25  
Autoclaving: Min. 25

### Technical References

#### Validation Guide:

SPK5788-e

Water Flow Rates for 10" Sartoclean GF Cartridges

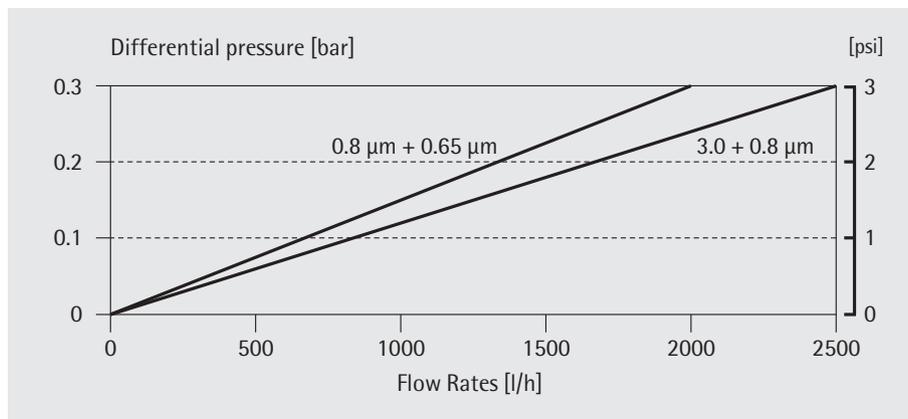

Standardized at 20 °C

### Order Information

Order Code	Pore Size [μm]	Pack Size [Pieces]
<b>Cartridges</b>		
560**04E1	0.8	1
560**04E2	0.8	1
560**04E3	0.8	1
560**05G1	0.65	1
560**05G2	0.65	1
560**05G3	0.65	1
<b>Mini Cartridges</b>		
5601504E7-----B	0.8	5
5601504E8-----B	0.8	5
5601504E9-----B	0.8	5
5601505G7-----B	0.65	5
5601505G8-----B	0.65	5
5601505G9-----B	0.65	5

\*\* : Adapter Type

### По вопросам продаж и поддержки обращайтесь:

Астана+7(7172)727-132, Волгоград(844)278-03-48, Воронеж(473)204-51-73, Екатеринбург(343)384-55-89,  
Казань(843)206-01-48, Краснодар(861)203-40-90, Красноярск(391)204-63-61, Москва(495)268-04-70,  
Нижегород(831)429-08-12, Новосибирск(383)227-86-73, Ростов-на-Дону(863)308-18-15, Самара(846)206-03-16,  
Санкт-Петербург(812)309-46-40, Саратов(845)249-38-78, Уфа(347)229-48-12

sst@nt-rt.ru || sartorius.nt-rt.ru